




# Instructions For: BSD1145

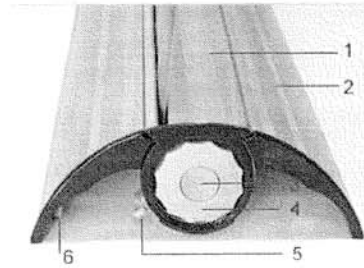

1. Clip Lid
2. Foldable Base
3. Tension Release Button
4. Tension Wheel
5. Roller Switch Button
6. Adjustable foot

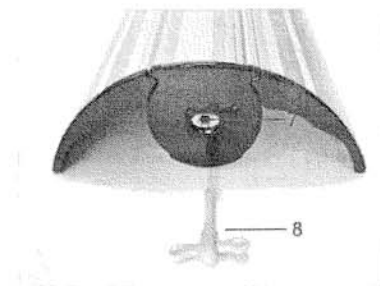

7. Roller Block Hole
8. "T" key



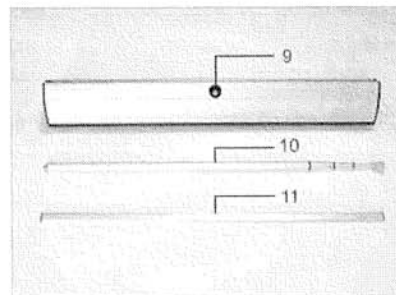


9. Pole holder
10. Telescoping Pole
11. Graphic Top Profile

## \* How to set up the base.




1. Take the base out of the bag.
2. Unfold the base completely. Position the unit on the ground.

**Attention: Don't put your fingers in the gap of the folding joints which might hurt your fingers.**





**\* How to set up the graphic.**

1. Insert the telescoping pole into the pole holder located in the center of the base. Turn the bottom segment of the pole until it's completely locked in the pole holder.
2. Open the clip lid of the base and take out the top profile. Close the clip lid.
3. Hold the graphic top profile and pull the graphic up to the top of the telescoping pole. Insert the top cap of pole into the top profile. Adjust the height of the pole to fit the height of the graphic.
4. Adjust the graphic tension whenever it is necessary (Refer to "How to gain/adjust graphic tension.") Set up is completed.






**\* How to attach the graphic at the top profile.**

1. Take the graphic top profile from bag.
2. Remove the plastic end cover from the top profile.
3. Open the snap lock and insert graphic. When the graphic is lined up, press/close the top profile and lock the graphic firmly.
4. Insert the plastic end cover back to the top profile.



**\* How to attach graphic at bottom.**

1. Position the base in front of you, and make sure you are facing to the front side of the base.
2. Open the clip lid of the base. Move the interior roller till the snap part is facing upwards.
3. Open firmly the snap part with fingers.
4. You need to stop roller moving when you are attaching graphic on the roller. The method is: hold the snap piece with one hand and insert "T" key into graphic entry groove with the other hand, then move the snap piece backwards till the snap piece is held and blocked by the edge/step of exterior frame.
5. Insert graphic at the entry groove of the snap. When the graphic end is completely inserted and lined up, press the snap and lock the graphic firmly.



### \* How to release graphic tension

1. Press firmly the tension release button till you hear the roller spring release sound.



### \* How to gain/adjust graphic tension

1. Press roller switch button firmly in the direction of the tension wheel center till the roller is sprung out and the wheel protrudes outside.
2. Turn the wheel clockwise to gain graphic tension.

(When the wheel is turning, graphic will be enrolled into unit inch by inch as graphic not being set up on the pole or the graphic will be tightened as graphic being set up on the pole. If graphic is found over tightened after being set up, tension need to be released and re-gained under the above mentioned instruction.)



### \* How to dismount graphic.

When you dismount graphic at bottom, make sure the graphic is set up on the pole.

1. Press tension release button firmly till you hear the roller spring release sound.
2. Open the clip lid of the base. Move the roller slightly with your hand to adjust the hole for "T" key inserting. Insert "T" key in the hole and block the roller.
3. Open firmly the snap-lock with fingers and remove the graphic from the roller.
4. Lower down the pole and remove graphic from the top.

